

## B10-24 / BB-WP - FIRE ALARM BELL



**B10-24/BB-WP**

### APPLICATIONS

The B10-24 provide durable and dependable operation required for life safety alarm systems.

Alarm bells are low current, high decibel notification appliances for use in fire or other signaling applications. The alarm bell is powered by 24VDC.

Alarm bells are available in 10" version and listed for indoor and outdoor applications. Alarm bells must be used with the BB-WP weatherproof box for outdoor use.


### SPECIFICATIONS

<b>Model</b>	B10-24
<b>Operating Voltage</b>	24VDC
<b>Alarm Current</b>	100mA
<b>dB at 10ft.</b>	96dB
<b>Operating Temperature (Indoor Application)</b>	32°F to 120°F (0°C to 48°C)
<b>Operating Temperature (Outdoor Application)</b>	-32°F to 150°F (-35°C to 65°C)
<b>Color / Material</b>	Red / Metal
<b>BB-WP Dimension</b>	4.25"W x 4.25"H x 1.5"D

### STANDARD FEATURES

- UL Listed
- High dbA output
- Mounts to a standard 4" square electrical box
- ANSI/UL Listed for outdoor use when used with the BB-WP weatherproof back box
- 18 AWG wire leads
- Meets ANSI/UL 464 requirements
- Red metal finish

### WIRING DIAGRAM

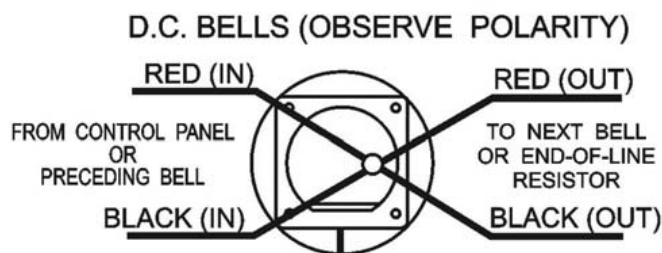

### PRODUCT LISTINGS

SIGNALING



**LISTED**  
464 - S1529



California State  
Fire Marshal  
7135-0410:0209

- UL 464 - S1529
- CSFM Listed - 7135-0410:0209

### Product Compliance

- NFPA 72

PART NUMBER	MODEL	DESCRIPTION
0500-07180	B10-24	B10-24 10 Fire Alarm Bell, 10", 24V, Coil Driven
0500-07190	BB-WP	BB-WP Bell Back Box, Weatherproof for B10-24

Specifications subject to change without notice.

Continued on back.

**B10-24 / BB-WP - FIRE ALARM BELL**

**MOUNTING**

